

# Staticide® TriMat

## Three-Layer ESD Matting


ACL's TriMat is a three-layer, chemically cross-linked rubber material with inherent electrical properties. With a conductive middle layer sandwiched between two dissipative layers, TriMat not only lays flat, but delivers a soft cushion of triple-tier protection making it ideal for EPA/ESD sensitive areas.

TriMat's embossed surface reduces parts slippage when working with sensitive components and assemblies. The durable rubber material is resistant against solder, heat, and most common solvents. It will not outgas or lose its electrical properties.

Using no vinyl monomers or DOP, TriMat ensures conformity to personal and environmental safety standards. Fully compliant to REACH, TriMat is not manufactured with any materials on the SVHC Candidate List.

### FEATURES

- ✿ Royal blue dissipative top and bottom
- ✿ Top and bottom surface resistance: <math>< 10^9</math> ohms
- ✿ Conductive black middle
- ✿ Thickness - .118" (3mm)
- ✿ Durable and resistant to oils, acids, and solders splashes.
- ✿ Appropriate for use in facilities following ANSI/ESD S20.20
- ✿ Precut mats include two 10mm female snaps
- ✿ Custom sizes available

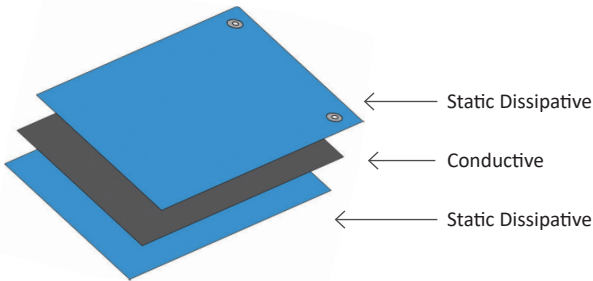

### Dimensions and Colors:

Roll Sizes : 32' x 24" (10m x .6m)

Mat Sizes : Pre-cut mat sizes come equipped with two, 10mm female snap sockets installed

### TriMat: .118" (3mm) thickness

#### Royal Blue

Roll: #6265RBR

Mat: #6265RBM

### Maintenance:

To clean mats and avoid insulative electrical readings, use a neutral cleaner such as ACL's 6001 Mat & Table Top Cleaner. The low alcohol, high surfactant formula provides deep cleaning without damaging the structural integrity of the TriMat material.

